

Ufofire


Premium Emergency Downlight with Self Test



FEATURES

- Low power consumption
- 50,000hr LED - energy efficient, long life
- Quick fit bracket for fast ceiling and wall mount
- Self testing function
- Non-maintained
- 3 hour discharge
- 3 year warranty
- Hard-wired
- Designed and manufactured to AS/NZS2293.3
- Self testing
- Dali option available as special order

DIMENSIONS

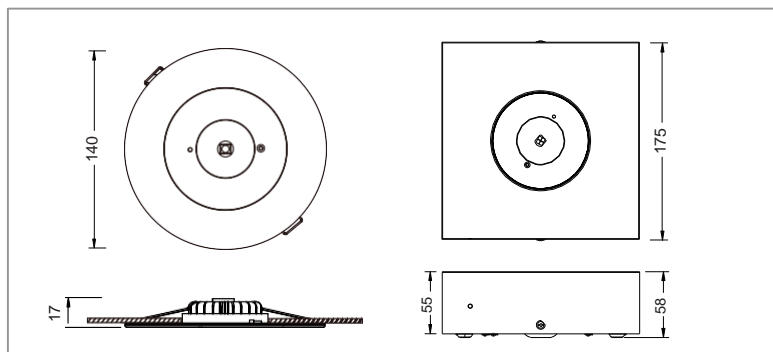

SPECIFICATIONS

	Recessed	Surface Mount
Order Code	E2109	E2109S
Model Number	LWUF2109	LWUF2109S
Input Voltage	240v	
Wattage	3w	
Construction	Polycarbonate body with aluminium heat sink	
Mounting	Recessed/Mounting	
Operating Mode	Non-Maintained	
Testing System	Self Testing	
Battery	Lithium 1500mAh LiFePO4 3 hour discharge	
AS2293 Classification	D40	
Applicable Standard	AS/NZS2293.3	
Operating Temp	1°C to 40°C	
Dimensions (mm)	140x17	175x58
Weight	0.45kg	0.93kg