

## Constant Voltage IP67 LED Driver

### Features :

- Input Voltage: 90-265VAC
- Power Range:150W
- High Efficiency: up to 88% ; PF>0.9
- IP67 Design; Flicker-free
- Cooling by free air convection
- Suitable for dry or damp location use
- Protection:short circuit/over loading/over current/ Over temperature
- 3 years warranty




Model No.	Power	Output Voltage	Output Current	Weight	Size(L*W*Hmm)	Packing
TLLS24-150WP	150W	12V 24V	12.5A 6.25A	1080g	221*68*39mm	15Pcs/16.3KG/CTN, 44.5*28.5*17.5CM

## ■ Specifications

Protection	Short Circuit	Hiccup mode, recover automatically after fault condition is removed
	Over Current	≤1.2*I out
Environment	Working TEMP.	-40 ~ +80°C
	Working Humidity	20~90%RH, non-condensing
	Storage TEMP. Humidity	-40~+80°C, 10~95%RH
	TEMP. coefficient	± 0.03%/°C (0~50°C)
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72min. each along X,Y,Z axes
Safety & EMC	Safety standards	EN60598
	Withstand voltage	I/P-O/P:3KVAC IP-FG:1.88KVAC O/P-FG:0.5KVAC
	Isolation resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25°C/70%RH
	EMC EMISSION	EN55022, EN55015 Class B
Notes	<p>1. All parameters if NOT specially mentioned are measured at 120VAC input , rated load and 25°C of ambient temperature.</p> <p>2. To extend the driver's using life , please reduce the loading at lower input voltage.</p>	

## ■ Dimensions

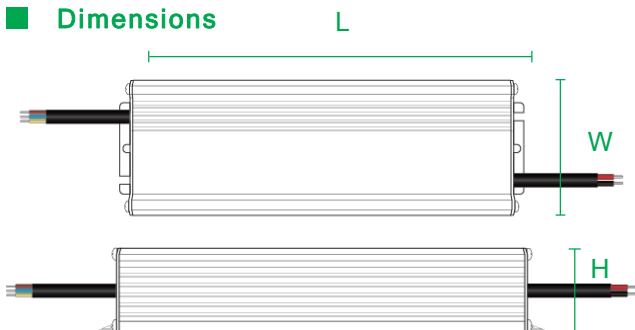

Model No.	Power	Size(L*W*H)
TLLS24-150WP	150W	221*68*39